

# SECUROPE NEO LIFELINE BETWEEN TWO WALLS OR ON CEILING

LIGNE DE VIE SECUROPE NEO ENTRE DEUX MURS OU AU PLAFOND

LÍNEA DE VIDA SECUROPE NEO ENTRE DOS MUROS O A TECHO

SECUROPE NEO ABSTURZSICHERUNG ZWISCHEN ZWEI WÄNDEN ODER ÜBERKOPF

Code N° ASSY SECU 003

June 2015

## DESCRIPTION

Flexible anchoring device Securope fixed between 2 walls or on ceiling, in accordance with EN 795 type C.



Compliant with EN 795 CLASS C  
MADE IN EU



Test certificate n° AT6495704

## TECHNICAL SPECIFICATION

- End and intermediate anchors Stainless Steel SS 316.
- End anchors are bolted in concrete with 2 M12 bolts.
- If the user is less than 3 m from the life line, 2 m absorbing lanyard, connects the user to the captive glider LDV060.
- If the user is more than 3 meters from the life line, retractable fall arrest block connects the Securope trolley LDV093 to the user.

Code N°	Description	Weight	Dimensions	Allowable force/ Breaking	Comments
LDV 054	End anchor SS316, wall fixing fitted with a crimping ring	0,8 kg	515 x 80 mm	18,5 KN / 37 KN	To be fixed on concrete wall with 2 bolts M12
LDV 006	Cable Ø 8 mm construction SS316	0,3 Kg	7 x 7 mm	18,5 / 37 KN	5 m and +
LDV 043	NEO intermediate anchor Inox 316 with rotation axle and shear pin SS 316	0,42 Kg	100 x 60 mm	6 KN / 15 KN	One NEO anchor every 12 m per lifeline
LDV 060	Captive Glider	0,254 Kg	70 x 27 x 45 x 32 mm	6 / 12 KN	One per user
LDV 093	Trolley on bearings for wall or ceiling	1 Kg	115 x 95 x 36mm	6 / 12 KN	One per user
LDV 053	End anchor SS316 wall fixing including energy absorber + turnbuckle	3,4 Kg	820 x 80 mm	18,5 KN / 37 KN	To be fixed on concrete wall with 2 anchors M12. Recommended for lifelines below 20 m in length




All the components for wall and/or ceiling configuration must be used in conjunction with other original Securope parts.

TEC0011-UK-SecuRope NEO 2012 on walls

· LDV 054 End anchor, wall fixing fitted with a crimping ring. To be fixed on concrete wall with 2 M12 bolts.



· LDV 006 Cable Ø 8 mm construction 7 x 7 SS316

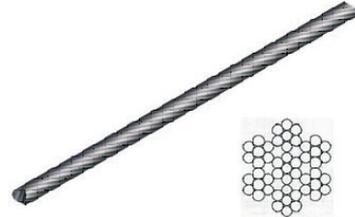

· LDV 043 NEO anchor SS316: The guide cable is hinged on shaft supported by the base. It has a rotational locking to prevent the anchor from pivoting when the cable is put under tension behind a curve. The crimping zone is part of the intermediate anchor. It has Shearing pin.



· LDV 060 Captive glider: Captive on cable. Stainless Steel SS316 + carabineer, galvanised steel included.




· LDV 093 Trolley on bearings for wall or ceiling configuration. If the user is more than 3 meters away from the lifeline a retractable fall arrest must be used with the glider.




· LDV 053 End anchor: Stainless Steel SS316 wall fixing including energy abs + turnbuckle. To be fixed on concrete wall with 2 M12 bolts



TEC0011-UK-SecuRope NEO 2012 on walls

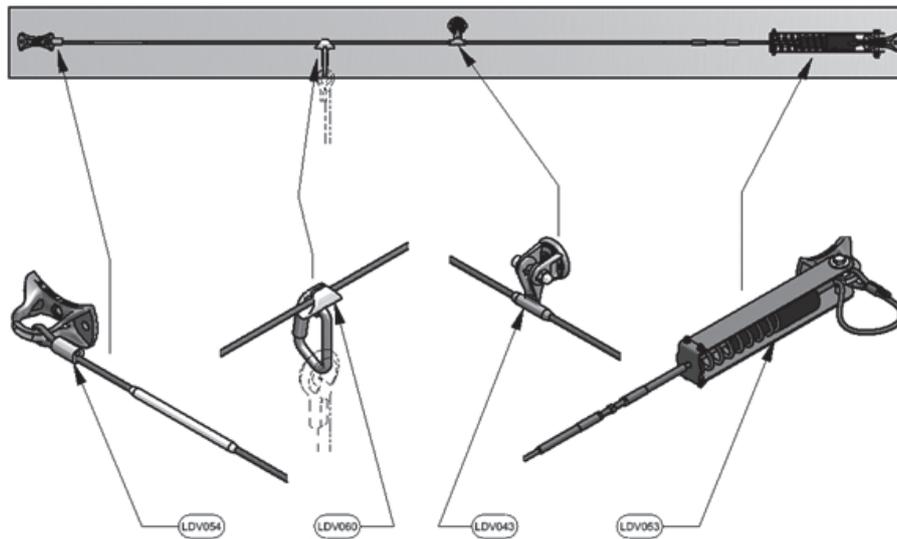

Securope NEO on wall with captive glider

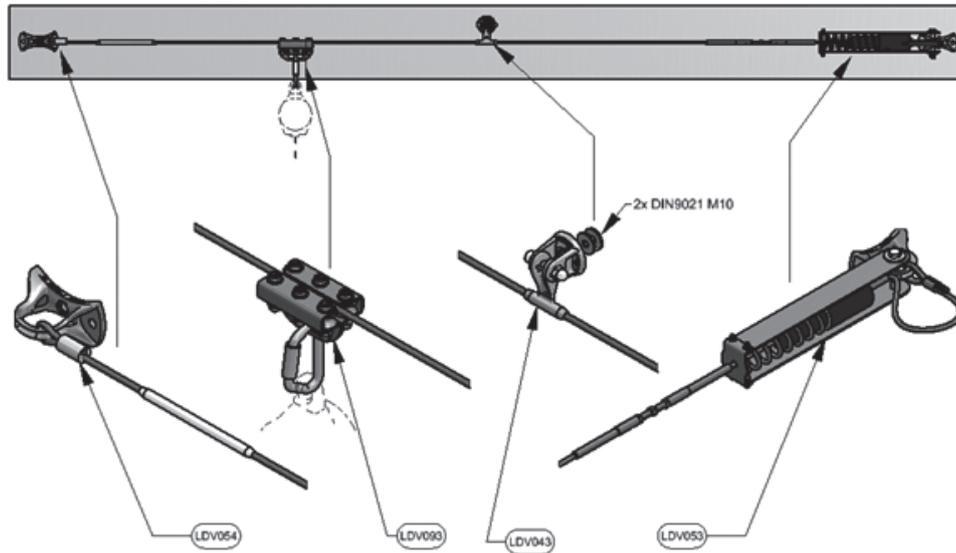

Securope NEO on wall with SecuRope glider

TEC0011-UK-SecuRope NEO 2012 on walls