

# ANCHOR EYE

PLAQUE D'ANCRAGE

PUNTO DE ANCLAJE DE ALTA VISIBILIDAD

ANKERPUNKT GELB

Code N° LDV 029

June 2015

## DESCRIPTION

The Yellow Anchor Eye Fallprotec is permanently installed on a building or other structure to maintain people who are at risk of falling when carrying out maintenance work.

The Yellow Anchor Eye must be assembly with 2 washers DIN9021 12 mm diameter with a M12 bolt in accordance with building structure.

The anchor is mobile on its axis.



Compliant with EN 795 CLASS A1  
MADE IN EU



Test certificate n°AT5146195

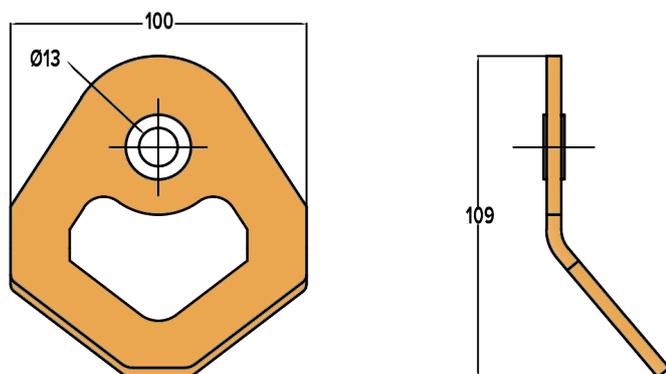


Fig. 1. Dimensions

## TECHNICAL SPECIFICATION

Comes with an installer and user manual.

Material: Folded steel plate and an eyepiece of POM (polyoxymethylene) Delrin.

**KN** 17 KN

~~**KN**~~ > 35 KN

**Ø** 13 mm

**KG** 0,28 Kg



Code N°	Length	Availability
LDV 029	100 x 108 mm	Available from stock



For installations ensure that concrete quality must be at least 25 MPa. Only one user can connect to the anchor point, and the working range has to be within 2 m.

TEC0001-UK-Anchor point large opening LDV029