

# SAFE ANCHOR: EMBEDDED ANCHOR POINT

SAFEANCHOR: POINT D'ANCRAGE PAR SCELLEMENT  
ANCLAJE SEGURO: PUNTO DE ANCLAJE INTEGRADO  
SICHERHEITSANKER: EINGELASSENER ANKERPUNKT  
Code N° LDV 055

June 2015

## DESCRIPTION

The Safeanchor meets EN 795 class A1 structural anchor for attachment to vertical, horizontal or inclined surfaces such as walls, columns, floors and lintels. The anchor is set by chemical sealing in concrete. The user attaches to the anchor via a lanyard fitted with a energy absorber or retractable block. The anchor is installed flush with the wall surface when not used. When using a simple touch brings out the anchor point for the carabiner. All system components are permanently attached, so that the anchor is operational at any time.



MADE IN EU



Compliant with EN 795 CLASS A1  
Test certificate n°AT5109376

## TECHNICAL SPECIFICATION

Comes with an installer and user manual.  
Material: stainless steel AISI316

- KN** 12 KN
- ~~**KN**~~ > 25 KN
- Ø** 32 mm x depth of sealing 100 mm
- KG** 250 gr

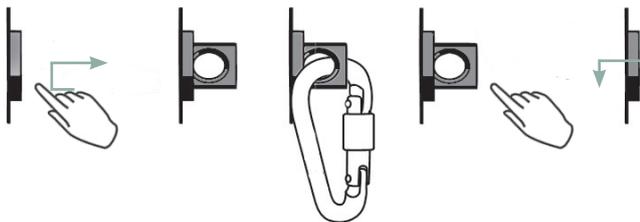


Fig. 1. Sequence of use

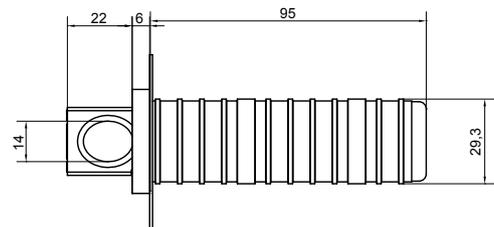


Fig. 2. Dimensions

Code N°	Length	Availability
LDV 055	90 mm	Available from stock



For installations ensure that concrete quality must be at least 25 MPa

TEC0002-UK-SafeAnchor LDV 055