

ANCHOR RING TWINFIX

L'ANNEAU D'ANCRAGE TWINFIX

PUNTO BI-ANCLAJE TWINFIX

TWINFIX ANKERPUNKT

Code N° LDV 057

June 2015

DESCRIPTION

The anchor ring Twinfix is permanently installed on a building or other structure to maintain people who are at risk of falling when carrying out maintenance work. It must be attached to the structure by two bolts M12.



Compliant with EN 795 CLASS A1
MADE IN EU



Test certificate n°AT5967034



TECHNICAL SPECIFICATION

Comes with an installer and user manual.
Material: Stainless steel molded AISI316

KN 25 KN

~~**KN**~~ > 50 KN

Ø 13mm

KG 0,43 Kg

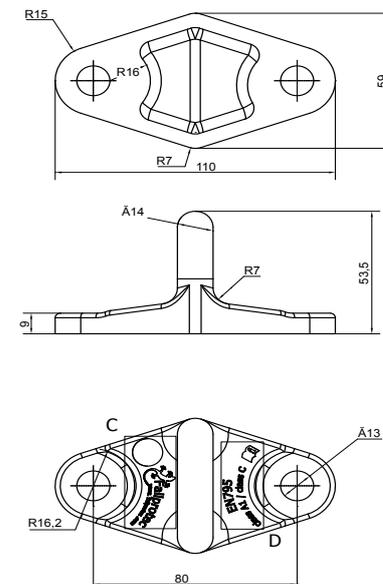


Fig. 2. General dimensions

Code N°	Length	Availability
LDV 057	53,5 x 59 x 110 x 9 mm	Available from stock



For installations ensure that concrete quality must be at least 25 MPa. A single user connected to the anchor point has a working range within 2 m.

TEC0003-UK-Anchor ring Twinfix LDV 057